


Male x Male Adaptors

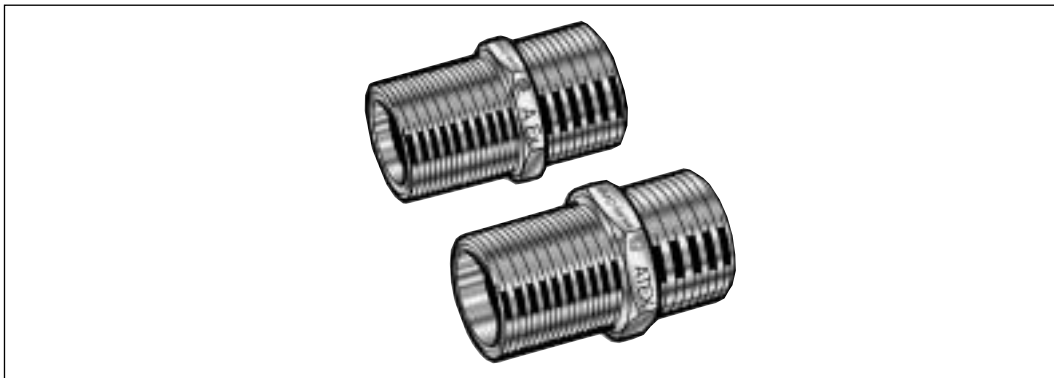

AM-D Series Male x Male Adaptors provide a method of matching female threadforms of the same size or of dissimilar size and threadform, while maintaining Ex certification.

CENELEC

Sira 99ATEX1114X
II 2DG E Ex d IIC

CSA / A Ex

Class I, Zone 1, Ex d IIC
Class I Division 1&2 ABCD
Class II EFG, Class III

Ingress Protection: IP54, CSA Enclosure Type (NEMA) 3
Impact Resistance: 7Nm
Ambient Temperature: -50 to +85°C
Materials: Brass, 316 Stainless Steel, Aluminium
Plating: Nickel, Zinc, other on application
Part Number: Please refer to *Part Numbering System*

Additional Information: Ex Male x Male Adaptors are not certified for connecting EExd Enclosures

Available thread sizes and corresponding bore size

Metric	Bore	NPT	Bore	BSP	Bore	ET	Bore	PG	Bore
M16	10.0			3/8"		5/8"	10.0	PG7	8.0
M20	14.0	1/2"	15.0	1/2"	15.0	3/4"	14.0	PG9	10.0
M25	18.0	3/4"	19.0	3/4"	19.0	1"	18.0	PG11	13.5
M32	24.0	1"	25.0	1"	25.0	1 1/4"	24.0	PG13.5	14.0
M40	32.0	1 1/4"	32.0	1 1/4"	32.0	1 1/2"	32.0	PG16	16.0
M50	41.0	1 1/2"	38.0	1 1/2"	38.0	2"	41.0	PG21	21.0
M63	53.0	2"	49.0	2"	49.0	2 1/2"	53.0	PG29	29.0
M75	64.0	2 1/2"	60.0	2 1/2"	60.0	3"	64.0	PG36	38.0
M80	69.0	3"	75.0	3"	75.0			PG42	45.0
M85	73.0	3 1/2"	88.0	3 1/2"	88.0			PG48	50.0
M90	78.0	4"	100.0	4"	100.0				
M100	88.0								

For full material specifications and options please refer to *Material Specifications*.